

Robertshaw®

9701i2

DELUXE
PROGRAMMABLE
THERMOSTAT



Even More Homeowner Friendly™

Features and Benefits

Would You Like
To Run the
Setup Wizard?

No Yes

Set-up Wizard **NEW**
Helps speed through the installation process with step-by-step setup and programming instructions.

Select Language

English
Español
Français

Back Next

Trilingual Display Option
Set to your customers' language of choice – English, Spanish or French

Mon To Sun Program

		HEAT	COOL
Wake	6:00 AM	70	78
Morn	8:00 AM	62	85
Eve	5:00 PM	70	78
Night	10:00 PM	62	82
Exit		Select	

Convenient Displays
View a full day of programming at once for quick review or easy adjustment.

Tech Support

Model 9725i vX.X
ABC HEAT
555-1234

Back

Contractor ID Feature
Set it yourself or custom order with your information preloaded. Your name and phone number remind your customers when service is needed.

Daylight Saving Time Adjustment

Automatically adjusts to correct time regardless of seasonal changes.

Adjustable Backlighting **NEW**

Choose to have backlighting on at all times or only when programming. You can also adjust the brightness and contrast for improved readability.

Time of Day Zoning **NEW**

When coupled with a remote sensor (part #9020i), you can control the temperature in remote locations given different scheduled events.

Menu Driven Display
1 Heat / 1 Cool

Programming Made Even Easier

Do you want to spend less time installing and setting up thermostats?

The new 9701i2 makes installation even easier with our new Setup Wizard. The Setup Wizard allows you to spend 50% less time setting up the thermostat over competitive models. Plus everything is in plain language so there are no complicated codes or button combinations to memorize.

We've also made programming even easier for your customers. Menus are easier to navigate. We've even added additional convenience features such as Automated Time adjustment for Daylight Saving Time, along with new indoor air quality reminders.

The new 9701i2 is so user friendly, it sets a higher standard in efficiency and simplicity for programmable thermostats. It is truly programming made even easier.

Three Levels of Security **NEW**

Secure protection against unwanted changes to the programming menus, temperature or set-up functions with your own 4-digit PIN.

Auto Changeover

Automatically adjusts between heating and cooling cycles to maintain optimal comfort.

Worry-Free Memory Storage

Even during power outages, the thermostat maintains set point and programmed parameters.

Adjustable Temperature Offset

Change the displayed temperature from the actual sensed temperature.

Adjustable Temperature Differential

Maintains optimal customer comfort.

Intermittent Fan

Maintains optimal air filtration and circulation with minimal energy use.



24 VAC POWERED

Five Year Warranty

Robertshaw®

9701i2 DELUXE PROGRAMMABLE THERMOSTAT




GAS ELECTRIC OIL HEAT PUMP

THE ROBERTSHAW 9701i2 REPLACES:

White-Rodgers Co.*	1F90-51, 1F90-71, 1F90-371, 1F97-51, 1F97-71, 1F97-371
Honeywell, Inc.*	TH8110U1003
Carrier Corp.*	P274-1100, P374-1100, P474-1100

* Verify specific application requirements before substitution.

Terminal Designations

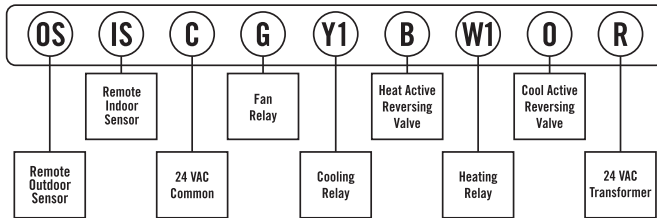

Optional Sensors:
9020i REMOTE INDOOR
9025i REMOTE OUTDOOR

Specifications

Electrical rating: 24 Volt AC (18-30 VAC)
1 amp maximum load per terminal (relay outputs)
3 amp total maximum load (all terminals combined)
Temperature control range: 45° - 90°F (7° - 32°C)
Accuracy: +/-1.0°F (+/-0.5°C)
Power Source: 24 VAC
Auto Changeover deadband: Selectable 2° to 8°F
Temporary temperature override: 3 hour maximum or next setpoint
Remote sensor capable: 1 indoor and 1 outdoor sensor
System configurations: Single-stage gas, oil or electric heating/cooling systems and single stage heat pump
Terminations: R, W1, Y1, B, O, G, C, IS, OS

Shipping Information

Indiv. Ctn. Dim.: 6.625" x 4.25" x 1.625"	Item 9020i and 9025i Remote Sensors
Master Ctn. Qty.: 6	Indiv. Ctn. Dim.: 2.625" x 1.5625" x 4.4375"
Master Ctn. Dim.: 9.25" x 5.625 x 7.5"	Master Ctn. Qty.: 6
Master Ctn. Cu. Ft.: .23	Master Ctn. Dim.: 5.625" x 5.125" x 5.125"
Master Ctn. Wt.: 3.5 lbs.	Master Ctn. Cu. Ft.: .09
Max. Pallet Qty.: 1260	Master Ctn. Wt.: .78 lbs.
Max. Pallet Wt.: 785 lbs.	

Other Single Stage Heat / Cool Thermostats

9200: Mercury-Free Deluxe Mechanical
9600: Programmable, 5-2 Day
9610: Programmable, 7 Day
9700i: Deluxe Programmable, 7 Day

Patent Information

This product is covered by one or more of the following U.S. patents. Foreign patent rights may be pending. 4967382, 5803357, 6502758, 7000849, D301207, D462940

Invensys®

Controls Americas
515 South Promenade Avenue
Corona California 92879-1736 USA
Telephone +1 800 951 5526 Facsimile +1 630 260 7299
Technical Service +1 800 445 8299
M-F 7:00 a.m. - 5:30 p.m. CST
www.about-i-series.com
©2006 Invensys Controls Americas 5/06 - #150-1978

	Invensys i2-Series	Honeywell Vision Pro	Carrier Infinity	White-Rodgers 1F97-371
Menu Driven (Ease of Programming)	X			
Installation Wizard	X			
Displays Complete Program	X			
Adjustable Backlighting	X			
Cooling System Monitor	X			
Heating System Monitor	X			
Multi-Language	X			
1/2 Degree Resolution	X			
Time of Day Zoning	X			
5/2 Program	X			X
24 Hour Programming	X			X
7-Day Programming	X	X	X	
Large Display	X	X	X	
Adjustable Timed Override/Hold	X	X		
Automatic Daylight Saving Time Adjustment	X	X		
Adjustable Temperature Limits	X	X		
High/Low Balance Points	X	X		
LED Status Indicators	X	X		
Adjustable Differential	X	X		
Adjustable Compressor Short Cycle Protection	X	X		
Adjustable Residual Cooling	X	X		
Fossil Fuel Kit required on HP units	No	No	Yes	Yes
Battery Free Memory Retention	X		X	
Manual Override	X	X	X	X
Resume	X	X	X	X
Auto Changeover	X	X	X	X
Gas/Electric	X	X	X	X
Single Stage Heat Pump Compatible	X	X	X	X
Line Powered	X	X	X	X
Programmable Fan	X	X	X	X
Intermittent Fan	X		X	
°F and °C	X	X	X	X
12 or 24 Hour	X	X		X
Air Filter Monitor	X	X	X	X
Humidifier Pad Monitor	X	X	X	
UV Light Monitor	X	X	X	
Vacation Setting	X	X	X	X
O & B Terminals	X	X	Partial	X
Events per day	2, 4, 6	4	4	2, 4
Remote Outdoor Sensor	X	Combo	X	X
Remote Indoor Sensor	X		X	X
Energy Efficient Recovery	X	X	X	X
Pre-set Program	X	X	X	X
Hidden Service Level	X	X	X	
Security Key Pad	X			X
Temperature Recalibration	X	X	X	
Customizable Contractor ID	X			Factory Only