

# Installation instructions

## Water Cooler water filter

### A replacement for the following water filters:

Avalon® filters

**Filter life:** 1,500 gallons or 6 months, whichever comes first will vary based on water condition.

**Sediment Filter Model:** EWF-2801BK, **Carbon Block Filter Model:** EWF-2801AK

### Installation instructions

**NOTE:** The machine in the picture comes from Avalon®, it is for installation instructions only.

1. When lifetime of the filter is near its end, either by means of water flow or by means of 6 months time, the filter indicator light (#4) on the right side of the front panel will blink red as a warning. When the filter lifetime is up, the indicator light will be steady red and the machine will beep to let you know that the filter needs to be changed. (Figure.1)

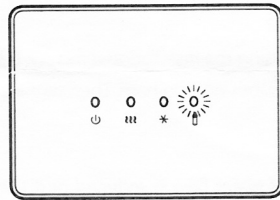


Figure.1

3. Twist the expired filters to remove them. Insert the new filters into the Filter Adapters by twisting them into place and rotating them counterclockwise.(Figure.3)

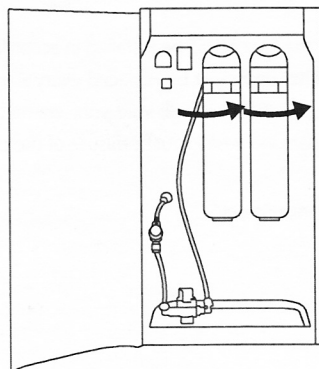


Figure.3

2. Shut off the Valve located at the connection to the water source or the Valve located to the left of the filters inside of the cabinet. (Figure.2)

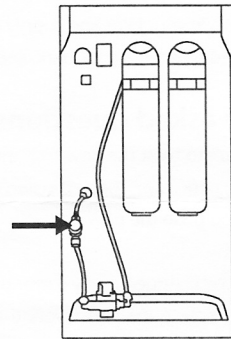


Figure.2

4. Turn on the Valve that was previously shut off. This Valve will be located at the connection to the water source or located to the left of the Sediment Filter. (Figure.4)


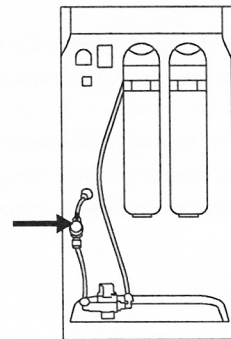


Figure.4

5. After replacing the filters, press and hold the Filter Reset Button (#15) located on the upper left side of the cabinet. Press and hold this button until the filter indicator light (#4) turns off. **(Figure.5)**

6. In order to flush the new filters, allow the water to flow from the cold water spout (#12) for approximately 2 minutes. **(Figure.6)**

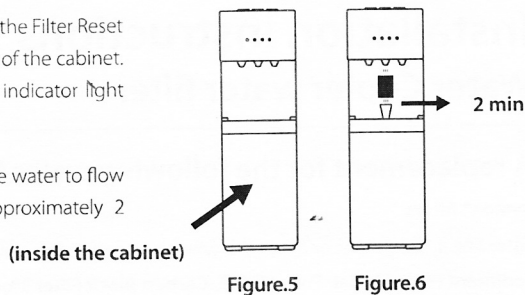

### **⚠ Caution:**

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

### **Storage and maintenance:**

- Replace your filter every 6 months or 1,500 gallons to achieve optimal performance and prevent bacteria and fungus growth in your filter and supply lines.
- Keep your unused filters in a cool, dark, and dry place until you need them.

### **Frequently asked questions:**

**Q:** Why is it difficult to twist the new filter into the filter housing?

**A:** Pressure inside may cause the expansion of connector, increasing the installation difficulty. Therefore, it is recommended you push the new filter in with a little bit of force, but not too hard. Then turn it counterclockwise.

**Q:** Must the filter be changed every 6 months?

**A:** Yes. You must replace the filter every 6 months or sooner if water flow is reduced or if there is heavy sediment trust sediment. Filters left in longer will fatigue, degrading the filter performance.

**Q:** Do I need to flush the filter before using?

**A:** Yes. It is highly recommended you flush the filter before using. Water filters are made from advanced coconut carbon block, so there are some carbon fines in the filter. You need to flush firstly to remove those carbon fines to get clean water.

### **⚠ Warning:**

To reduce the risk of property damage due to water leakage, the filter **MUST** be installed in accordance with the manufacture's specifications and instructions. This filter unit must be replaced every 6 months or 1,500 gallons . Failure to follow instructions and operating specifications will void your warranty. What's more, manufacturer assumes no responsibility or liability for damage arising out of misuse of the product. Actual result varies according to the local water quality.

**“ ⚠ WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)”**