

High Flow CSR Plus-XC²

with two remote SR-X Systems

EVERPURE

APPLICATIONS

Fountain
Coffee
Ice
Steam

BENEFITS

One system provides premium quality water to high flow fountain, coffee and ice machines

New and improved Micro-Pure II[®] media inhibits the growth of bacteria

Ideal where extreme water conditions demand larger capacity filters and surge tank to meet peak demand flow requirements

Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces health contaminants such as cysts

20" prefilter captures larger dirt particles

Two mounted SR-X Systems with SS-IMF cartridges (included) inhibit limescale buildup in ice machines and coffee brewers

Sanitary cartridge replacement is simple

NSF Certified under NSF/ANSI Standards 42 and 53

OPERATIONAL TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure falls below 10 psi

Change SS-IMF cartridge before Hydroblend[™] compound is completely used up

Change prefilter cartridge when excessively dirty

Always flush the filter cartridge at time of installation and cartridge change



High Flow CSR Plus-XC² System: EV9347-10

XC² Replacement Cartridge: EV9613-10

EC210 Prefilter Replacement Cartridge: EV9534-26

SS-IMF Replacement Cartridge: EV9799-32

SPECIFICATIONS

Overall Dimensions:	29.69"H x 31.58"W x 6.75"D (excludes tank and SR-X)
Service Flow Rate:	Maximum 6.7 gpm (25.4 Lpm)
Connections:	Inlet connection: 3/4" Outlet connection: 3/4"
Rated Capacity:	48,000 gallons (181,699.87L)
Pressure Requirements	10 - 125 psi (0.7 - 8.6 bar), non-shock
Maximum Temperature:	35 -100°F (2- 38°C)
Electrical Power Supply:	None required
Operating Weight:	50 lbs. system; 60 lbs. tank (22.78 kg system; 27.22 kg tank)
Shipping Weight:	System is packed in two boxes and can be shipped via UPS. Box 1, System: 44 lbs.; Box 2, Surge Tank: 28 lbs.

High Flow CSR Plus-XC²

with two remote SR-X Systems

EV9347-10

INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating

Use 3/4" water line

Fountain equipment connections are made to the outlet part of the system before the SR-X system

Coffee brewer and ice machine connections are made after the SR-X feeder; a tee is required

Install vertically with cartridges hanging down.

Allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Flush cartridges by running water through flushing valve for five minutes at full flow


This system must be installed and maintained according to the manufacturer's instructions, including installation and replacement of filter cartridges

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Everpure water treatment systems are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

For Technical Assistance, please
email: servicespecialist@pentair.com
or call: 800-942-1153

Everpure reserves the right to update specifications, change prices, or make substitutions without notice.

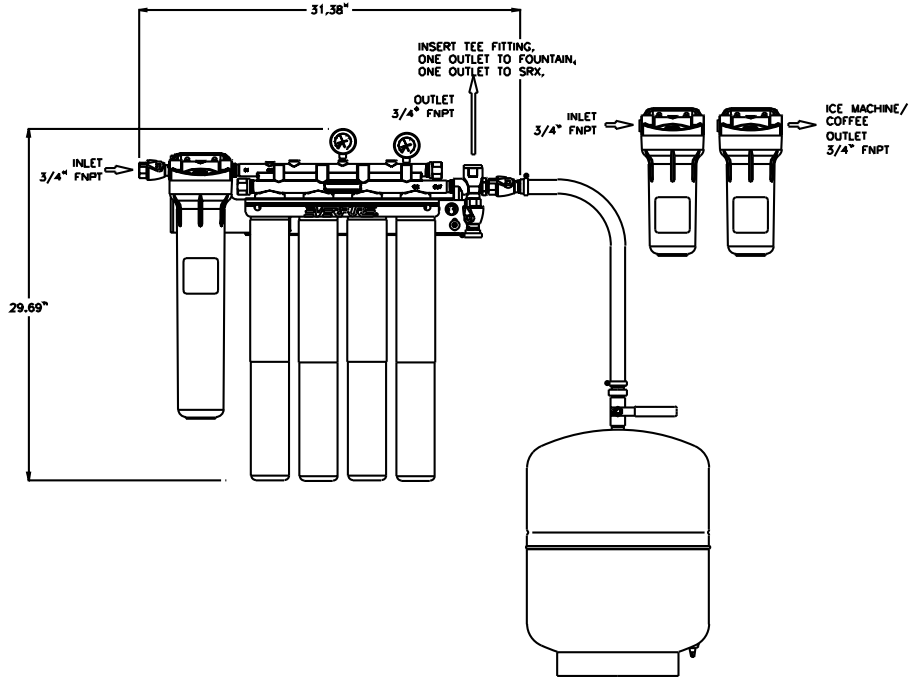

System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

- Standard No. 42 — Aesthetic Effects
- Chemical Reduction
- Taste and Odor
- Chlorine
- Mechanical Filtration
- Particulate Class I
- Standard No. 53 — Health Effects
- Mechanical Filtration
- Cyst



EV9347-10 HiFlo CSR Plus-XC2 DE11



Visit our website at www.everpure.com

Pentair Filtration Solutions, LLC
World Headquarters-Everpure/SHURflo
North and South America Sales
1040 Muirfield Dr.
Hanover Park, Illinois 60133
USA
TEL: 800.942.1153 (US only)
TEL: 630.307.3000
FAX: 630.307.3030
EMAIL: cseverpure@pentair.com

Everpure-SHURflo Australia
2 Redwood Drive
Notting Hill
Victoria, 3168
AUSTRALIA
TEL: 011.61.39.574.4000
FAX: 011.61.39.562.7237
EMAIL: au.everpure@pentair.com

Everpure-SHURflo Southeast Asia
18 Boon Lay Way
#04-110/111
TradeHub 21, 609966
SINGAPORE
TEL: 65.6795.2213
FAX: 65.6795.2219
EMAIL: cseverpure@pentair.com

Everpure-SHURflo Europe
Pentair Water Belgium bvba
Industriepark Wolfstee
Toekomstlaan
30 B-2200 Herentals, BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505
EMAIL: sales@everpure-europe.com

Everpure-SHURflo India
Green Boulevard, B-9/A, 7th Floor -
Tower B Sector 62, Noida - 201301
TEL: 91.120.419.9444
FAX: 91.120.419.9400
EMAIL: indiacustomer@pentair.com

Everpure-SHURflo Japan Inc.
Hashimoto MN Bldg. 7F
3-25-1 Hashimoto, Midori-ku
Sagamihara-Shi Kanagawa 252-0143
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015
EMAIL: info@everpure.co.jp

Everpure-SHURflo China
21F Cloud 9 Plaza, No 1118,
Shanghai, 200052
CHINA
TEL: 86.21.3211.4588
FAX: 86.21.3211.4580
EMAIL: China.Water@Pentair.com